


FICHA TÉCNICA

TORNILLO DIN 464

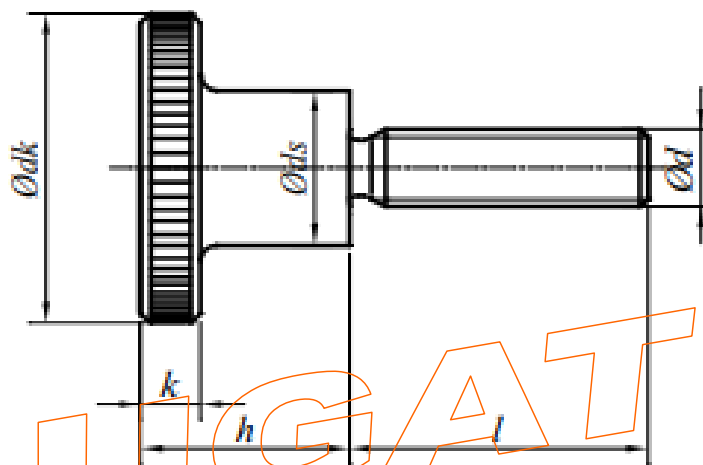

DIMENSIONES

| <i>Ød</i> | <i>nom.</i> | M2 | M2,5 | M3 | M4 | M5 | M6 | M8 | M10 |
|------------|-------------|-----|------|-----|-----|------|----|------|-----|
| <i>P</i> | | 0,4 | 0,45 | 0,5 | 0,7 | 0,8 | 1 | 1,25 | 1,5 |
| <i>Ødk</i> | | 9 | 11 | 12 | 16 | 20 | 24 | 30 | 36 |
| <i>Øds</i> | | 4,5 | 5 | 6 | 8 | 10 | 12 | 16 | 20 |
| <i>h</i> | | 5,3 | 6,5 | 7,5 | 9,5 | 11,5 | 15 | 18 | 23 |
| <i>k</i> | | 2 | 2,5 | 2,5 | 3,5 | 4 | 5 | 6 | 8 |

COINDICIONES TÉCNICAS DE SUMINISTRO

| Material | Steel | Stainless steel | Non-ferrous metals |
|------------|--|-----------------------|----------------------|
| Thread | 6g tolerance acc. to ISO 965-1 | | |
| Properties | St acc. to EN 10087, EN 10277-3 | A1, A2 acc. to 3506-1 | CU3 acc. to EN 28839 |
| Tolerances | product grade: ≤ M1,4; F; ≥M1,6: A acc. to DIN 267-6, ISO 4759-1 | | |
| Finish | as processed | plain | plain |
| | elektroplating acc. to ISO 4042 | | |
| | phodphating acc. to EN 12476 | | |

Example designation of knurled thumb screw, high type form B, threaded M5, nominal length $l = 20$ mm, made of steel:

Knurled screw DIN 464 - B - M 5 x 20 - St