


FICHA TÉCNICA

TORNILLO DIN 653

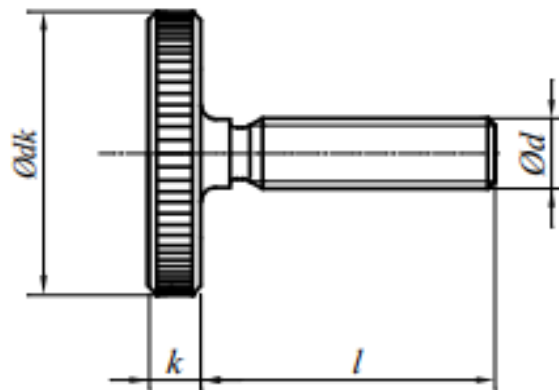

DIMENSIONES

<i>Ød</i> nom.	M2	M2,5	M3	M4	M5	M6	M8	M10
<i>P</i>	0,4	0,45	0,5	0,7	0,8	1	1,25	1,5
<i>Ødk</i>	9	11	12	16	20	24	30	36
<i>k</i>	2	2,5	2,5	3,5	4	5	6	8

COINDICIONES TÉCNICAS DE SUMINISTRO

Material	Steel	Stainless steel	Non-ferrous metals
Thread	6g tolerance acc. to ISO 965-1		
Properties	St acc. to EN 10087, EN 10277-3	A1, A2 ISO 3506-1	CU3 acc. to EN 28839
Tolerances	product grade: ≤ M1,4: F; ≥ M1,6: A acc. to DIN 267-6, ISO 4759-1		
Finish	as processed	plain	plain
	elektroplating acc. to ISO 4042		
	phodphating acc. to EN 12476		

Example designation of knurled thumb screw, low type, threaded M5, nominal length $l = 20$ mm, made of steel:

Knurled screw DIN 653 - M 5 x 20 - St