


FICHA TÉCNICA

TORNILLO DIN 7500-C

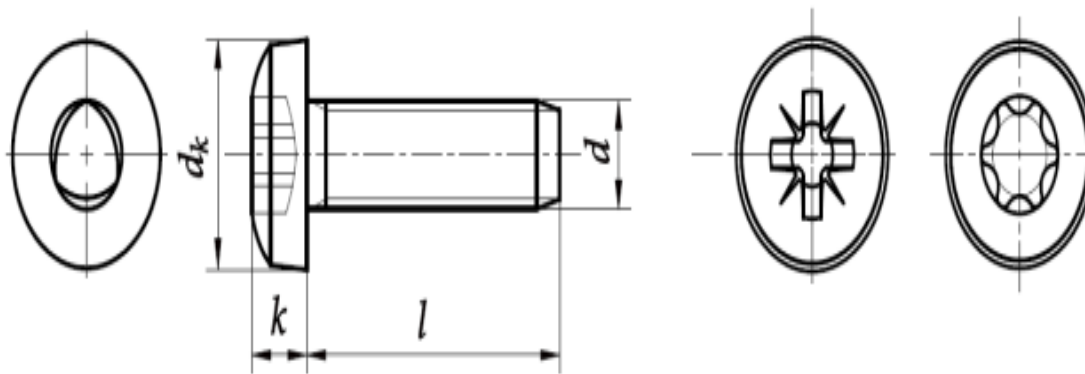

DIMENSIONES

<i>d</i>		M2	M2,5	M3	M3,5	M4	M5	M6	M8
<i>d_k</i>	<i>max</i>	4	5	6	7	8	10	12	16
	<i>min</i>	3,7	4,7	5,7	6,64	7,64	9,64	11,57	15,57
<i>k_{max}</i>	<i>nom</i>	1,6	2	2,4	2,7	3,1	3,8	4,6	6
	<i>max</i>	1,72	2,12	2,52	2,82	3,25	3,95	4,75	6,15
	<i>min</i>	1,48	1,88	2,28	2,58	2,95	3,65	4,45	5,85
Z		-	-	-	-	2	2	3	4
T		6	8	10	15	20	25	30	40

*Z – Pozidriv cross recessed
T – Torx hexalobular socket*

Example designation thread forming raised cheese head screw, cross recessed Z, thread M 6, nominal length l = 35 mm:

Thread-forming screws DIN 7500 C – M 6x35 -Z