


EQUIVALENCIA DIN 982 / ISO 7040 / DIN 6924

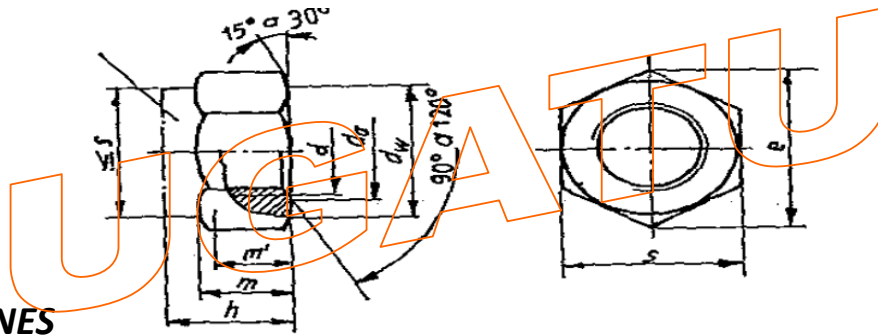

DIMENSIONES

MEDIDA (d)	TAMAÑO DE LLAVE (s)		ALTURA (h) min. max.			ALTURA min. DE APRIETE (m'/mw)	
	DIN 982	DIN 6924 ISO 7040	DIN 982	ISO 6924	ISO 7040	DIN 982 DIN 6924	ISO 7040
M3	5.5		-	4.2 - 4.5	4.02 - 4.50	1.72	1.72
M4	7		-	5.7 - 6.0	5.52 - 6.00	2.32	2.32
M5	8		6.00 - 6.30	6.44 - 6.80	6.22 - 6.80	3.52	3.52
M6	10		7.70 - 8.00	7.64 - 8.00	7.42 - 8.00	3.92	3.92
M7	11		8.20 - 8.50	8.64 - 9.00	-	4.91	-
M8	13		9.14 - 9.50	9.14 - 9.50	8.92 - 9.50	5.15	5.15
M10	17	16	11.14 - 11.50	11.14 - 11.50	11.2 - 11.9	6.43	6.43
M12	19	18	13.64 - 14.00	13.64 - 14.00	14.2 - 14.9	8.30	8.30
M14	22	21	15.3 - 16.0	15.3 - 17.0	15.9 - 17.0	9.68	9.68
M16	24		17.3 - 18.0	18.26 - 19.10	17.8 - 19.1	11.28	11.28
M18	27		19.16 - 20.00	19.76 - 20.60	-	12.08	-
M20	30		20.7 - 22.0	21.5 - 22.8	20.7 - 22.8	13.52	13.52
M22	32	34	23.7 - 25.0	23.2 - 24.5	-	14.48	-
M24	36		26.7 - 28.0	25.8 - 27.1	25.0 - 27.1	16.16	16.16
M27	41		-	29.4 - 31.0	-	18.00	-
M30	46		-	31.0 - 32.6	30.1 - 32.6	19.44	19.44
M33	50		-	33.9 - 35.5	-	21.92	-
M36	55		-	37.3 - 38.9	36.4 - 38.9	23.52	23.52
M39	60		-	40.4 - 42.0	-	25.44	-
M42	65		-	43.4 - 45.0	-	27.20	-
M45	70		-	46.4 - 48.0	-	28.80	-
M48	75		-	48.4 - 50.0	-	30.40	-