


FICHA TÉCNICA

TORNILLO ISO 14579

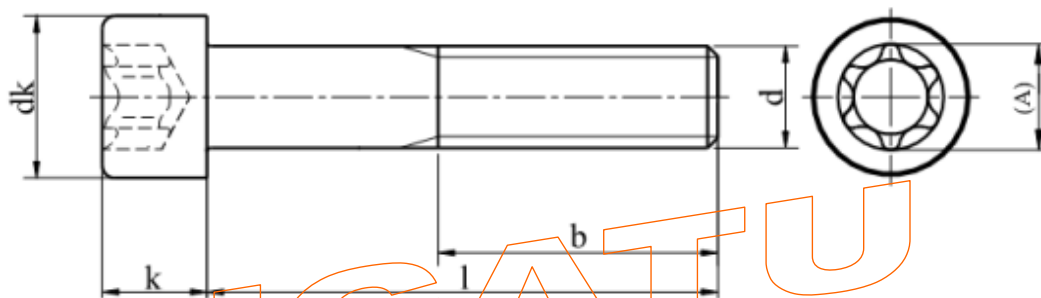

DIMENSIONES

<i>d</i>	M2	M2,5	M3	M4	M5	M6	M8	M10	M12	(M14)	M16	
<i>P</i>	0,4	0,45	0,5	0,7	0,8	1	1,25	1,5	1,75	2	2	
<i>b</i> ~	16	17	18	20	22	24	28	32	36	40	44	
<i>d_k</i>	<i>max¹⁾</i>	3,8	4,5	5,5	7	8,5	10	13	16	18	21	24
	<i>max²⁾</i>	3,98	4,68	5,68	7,22	8,72	10,22	13,27	16,27	18,27	21,33	24,33
	<i>min</i>	3,62	4,32	5,32	6,78	8,28	9,78	12,73	15,73	17,73	20,67	23,67
<i>k</i>	<i>max</i>	2	2,5	3	4	5	6	8	10	12	14	16
	<i>min</i>	1,86	2,36	2,68	3,82	4,82	5,7	7,64	9,64	11,57	13,57	15,57
Gniazdo Socket	<i>No</i>	6	8	10	20	25	30	45	50	55	60	70
	<i>A ~</i>	1,75	2,4	2,8	3,95	4,5	5,6	7,95	8,95	11,35	13,45	15,7

<i>d</i>	(M18)	M20	
<i>P</i>	2,5	2,5	
<i>b_{min}</i>	48	52	
<i>d_k</i>	<i>max¹⁾</i>	27	30
	<i>max²⁾</i>	27,33	30,33
	<i>min</i>	26,67	29,67
<i>k</i>	<i>max</i>	18	20
	<i>min</i>	17,57	19,48
Gniazdo Socket	<i>No</i>	80	90
	<i>A ~</i>	17,75	20,2



COINDICIONES TÉCNICAS DE SUMINISTRO

Material		Steel	Stainless steel	Non-ferrous metals
General requirements	Norma Standard	ISO 8992		
Thread	Tolerance	5g6g for property class: 12.9 For other property classes: 6g		
	Norma Standard	ISO 261, ISO 965-2, ISO 965-3		
Mechanical properties	Property class	<M3: jak uzgodniono as agreed ≥M3 i ≤M20: 8.8, 9.8, 10.9, 12.9	A2-70, A4-70, A3-70, A5-70	as agreed
	Norma Standard	ISO 898 -1	ISO 3506-1	ISO 8839
Tolerancje Tolerances	Product grade	A		
	Norma Standard	DIN ISO 4759-1		
Hexalobular socket	Norma Standard	ISO 10664		
Finish and/or coating		As processed	Plain	Plain
		Requirements for electroplating are covered in ISO 4042. Requirements for non-electrolytically applied zinc flake coating are covered in ISO 10683.		Requirements for electroplating are covered in ISO 4042.
Surface discontinuities		Limits for surface discontinuities are covered in ISO 6157-1 and for property class 12.9 in ISO 6157-3		
Acceptability		Acceptance procedure is covered in ISO 3269		