


EQUIVALENCIA ISO 10511 / DIN 985

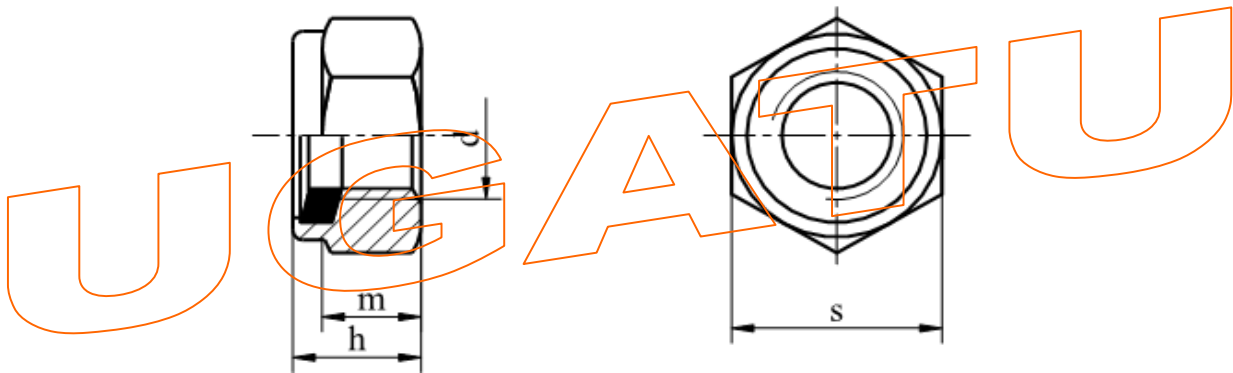

DIMENSIONES

MEDIDA	M3	M4	M5	M6	(M7)	M8	M10	M12
s _{DIN/ISO}	5,5	7	8	10	11	13	17/16	19/18
h _{DIN min/max}	3,7-4,0	4,7-5,0	4,7-5,0	5,7-6,0	7,14-7,50	7,64-8,00	9,64-10,00	11,57-12,00
h _{ISO min/max}	3,42-3,90	4,52-5,00	4,52-5,00	5,52-6,00	-	6,18-6,76	7,98-8,56	9,53-10,23
m _{DIN/ISO}	1,65/1,24	2,2/1,56	2,75/1,96	3,3/2,32	3,85/-	4,4/2,96	5,5/3,76	6,6-4,56

MEDIDA	M12	(M14)	M16	(M18)	M20	(M22)	M24	(M27)
s _{DIN/ISO}	19/18	22/21	24	27	30	32/34	36	41
h _{DIN min/max}	11,57-12,00	13,3-14,0	15,3-16,0	17,66-18,5	18,7-20,0	20,7-22,0	22,7-24,0	25,7-27,0
h _{ISO min/max}	9,53-10,23	10,22-11,32	11,32-12,42	-	13,1-14,9	-	16,0-17,8	-
m _{DIN/ISO}	6,6-4,56	7,7-5,14	8,8/5,94	9,9/-	11/7,28	12,2/-	13,2/8,72	14,8/-

MEDIDA	M30	(M33)	M36
s _{DIN/ISO}	46	50	55
h _{DIN min/max}	28,7-30,0	31,4-33,0	34,4-36,0
h _{ISO min/max}	20,1-22,2	-	23,4-25,5
m _{DIN/ISO}	16,5/11,12	18,2/-	19,8/13,52