


FICHA TÉCNICA

TORNILLO ISO 7053-C

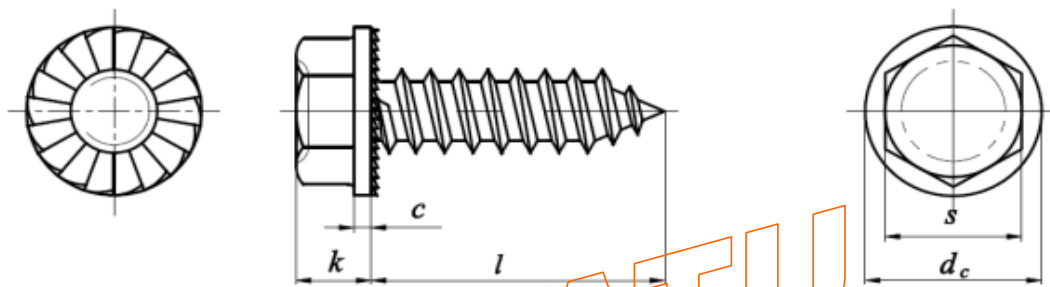

DIMENSIONES

<i>d</i>		ST 2,2	ST2,9	ST3,5	ST 3,9	ST4,2	ST4,8	ST5,5	ST6,3
<i>P^a</i>		0,8	1,1	1,3	1,3	1,4	1,6	1,8	1,8
<i>d_c</i>	<i>max</i>	4,2	6,3	8,3	8,3	8,8	10,5	11	13,5
	<i>min</i>	3,8	5,8	7,6	7,6	8,1	9,8	10	12,2
<i>k</i>	<i>max</i>	2	2,8	3,4	3,4	4,1	4,3	5,4	5,9
	<i>min</i>	1,7	2,5	3	3	3,6	3,8	4,8	5,3
<i>S_{nom}</i>		3	4	5,5	5,5	7	8	8	10
<i>C_{min}</i>		0,25	0,4	0,6	0,6	0,8	0,9	1	1



COINDICIONES TÉCNICAS DE SUMINISTRO

Material		Steel	Stainless steel
General requirements		ISO 8992	
Thread		ISO 1478	
Property class	Material	ISO 2702	A2 20H, A4 20H
	Standards		DIN ISO 3506-4
Tolerances	Product grade	A	
	Norma Standard	DIN ISO 4759-1	
<i>As processed</i>			
<i>Limits for surface roughness are covered in DIN 267-2</i>			
Surface treatment		<p><i>Requirements for electroplating are specified in ISO 4042</i></p> <p><i>Requirements for non-electrolytically applied zinc flake coating are specified in ISO 10683</i></p> <p><i>Additional requirements or other finishes or coatings shall be agreed between the supplier and purchaser</i></p>	
Acceptability		<i>Acceptance procedure is specified ISO 3269</i>	